


# CXO300

## Technical Specification

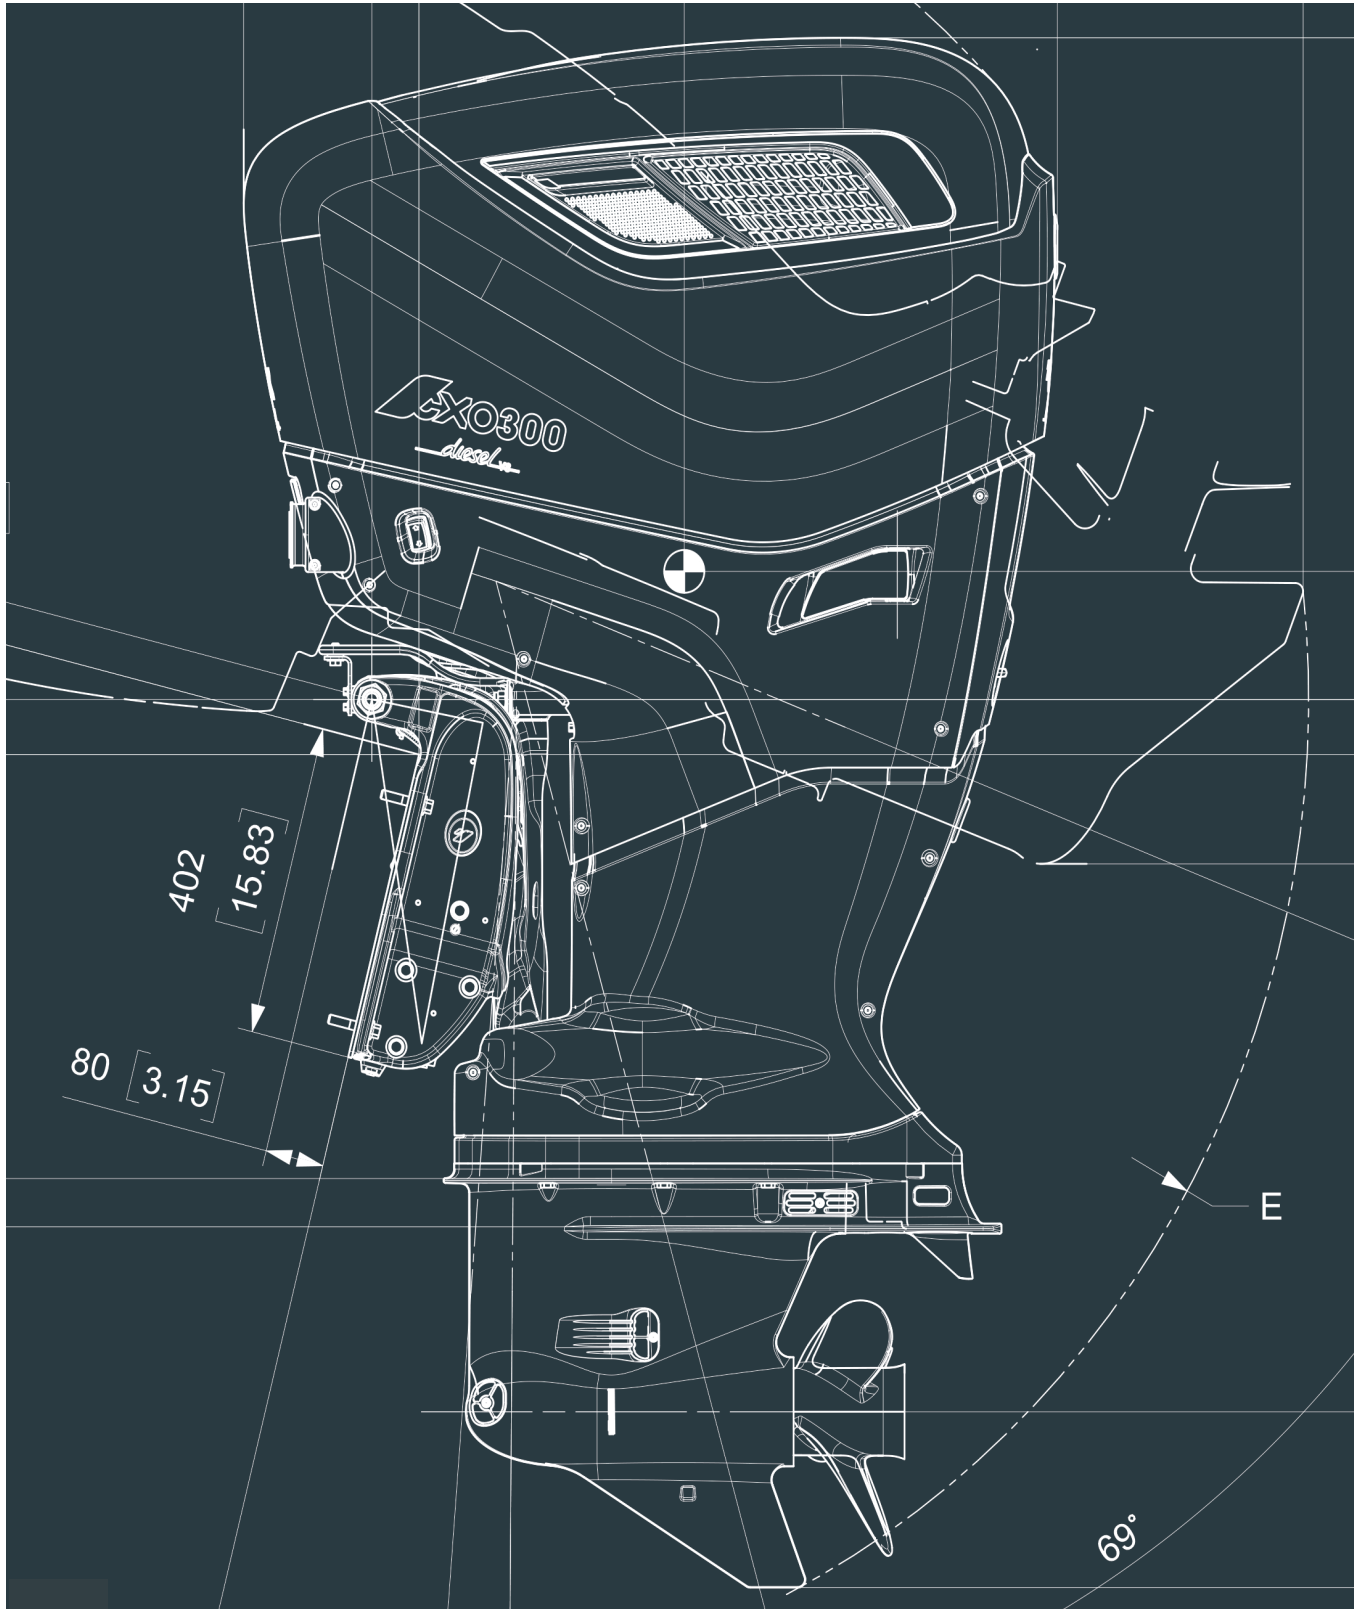

<b>COX</b>	TYPE	CXO300	DIESEL OUTBOARD ENGINE
	YEAR	2020	

**CXO300**

[coxmarine.com](http://coxmarine.com)



**CXO300**  
 Technical data

Engine designation	CXO300
Propeller shaft power, kW (hp)	224 (300)
Engine propping speed, rpm	3700-4000
Displacement, L (cu.in.)	4.4 (266)
Weight, kg (lb)	393 (866)
Number of cylinders	8
Bore/stroke, mm (in.)	84 (3.3) / 98.5 (3.9)
Compression ratio	16:1
Ratio 1 (Propeller speed)	1.23:1 (3259)
Ratio 2 (Propeller speed)	1.46:1 (2739)
Peak torque, Nm (lb.ft)	650 (479)
Aspiration	Twin-turbo
Shaft Length, inch(mm)	25"(635)/30"(762)/35"(889)
Emission compliance	EPA 3, IMO II, RCD II
Start assist	Glow plugs
Rating	Light-duty commercial
Trim range	-4° to +16°
Tilt range	71°
Gear oil spec	SAE 80W90, API GL-5
Powerhead oil spec	Min standard - fully synthetic API CI-4/ SAE 10W40 or 5W40
Propeller spline spec	1.25" shaft / 19 tooth
Colour options	Black / White

**CXO300**  
 Technical description

**Powerhead**

- 60 degree V8
- Aluminium alloy block, heads and ladder frame
- Quad camshafts, four valves per cylinder

**Outboard mounting**

- Standard outboard fitting layout
- 6-bolt mounting with multi-hole adjustment
- 30" transom spacing (28.5" with steering limits)

**Fuel system**

- Electronically controlled high pressure common rail fuel injection
- On-engine fuel filtration and cooling

**Air inlet and exhaust system**

- Twin turbochargers with electronic boost control
- Water-to-air charge cooling
- Air filters with replaceable inserts

**Transmission**

- 90-degree spiral bevel gear drive
- All outboards offer standard and counter rotating capability, programmable through the ECU

**Cooling system**

- Thermostatically regulated raw water cooling
- Solid impeller low-maintenance water pump

**Oil System**

- Closed crankcase ventilation

**Electrical system**

- Drive-by-wire power and shift control
- 12V system voltage
- 100A flywheel-integrated marine alternator
- Automatic integrated fuses

**Propeller**


- Maximum propeller diameter 16in
- 19 tooth 1.25" propeller spline

**CXO300**  
 Instruments and controls


**Instruments/Controls**

- Dometic electronic throttle
- Dometic joystick
- CoastKey key-less fob / wireless MOB technology
- CAN J1939 Controls and Displays
- Compatible with NMEA 2000
- Murphy Powerview displays – 4.8"/7"/12"
- Compatible with all Dometic EPS steering

**CXO300**  
 Fuel Flow

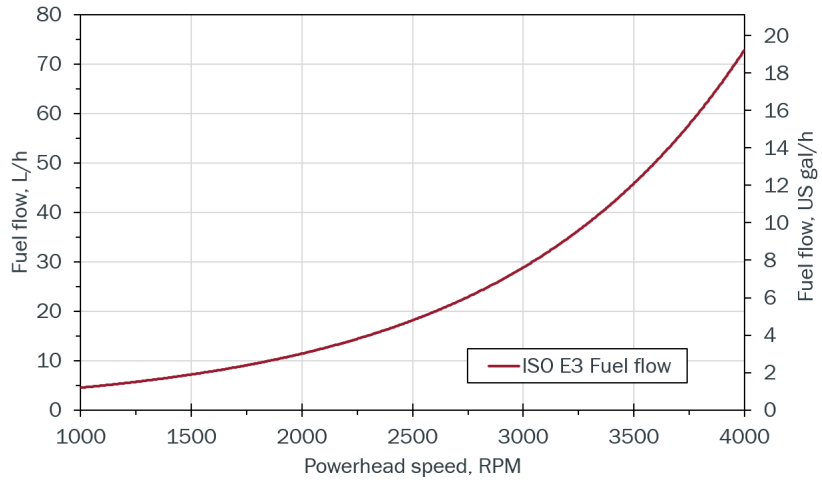



**CXO300**  
 Power at Propeller (hp)

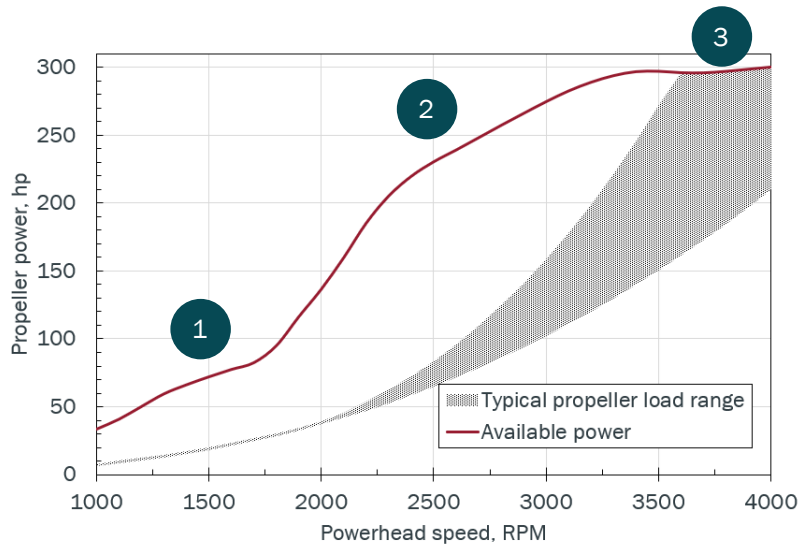

- 1 Restricted torque at very low RPM avoids overpowering the propeller
- 2 Substantial mid-range torque provides powerful and responsive acceleration and cruise performance
- 3 Broad power peak provides the full 300 hp across a wide range of vessel loadings



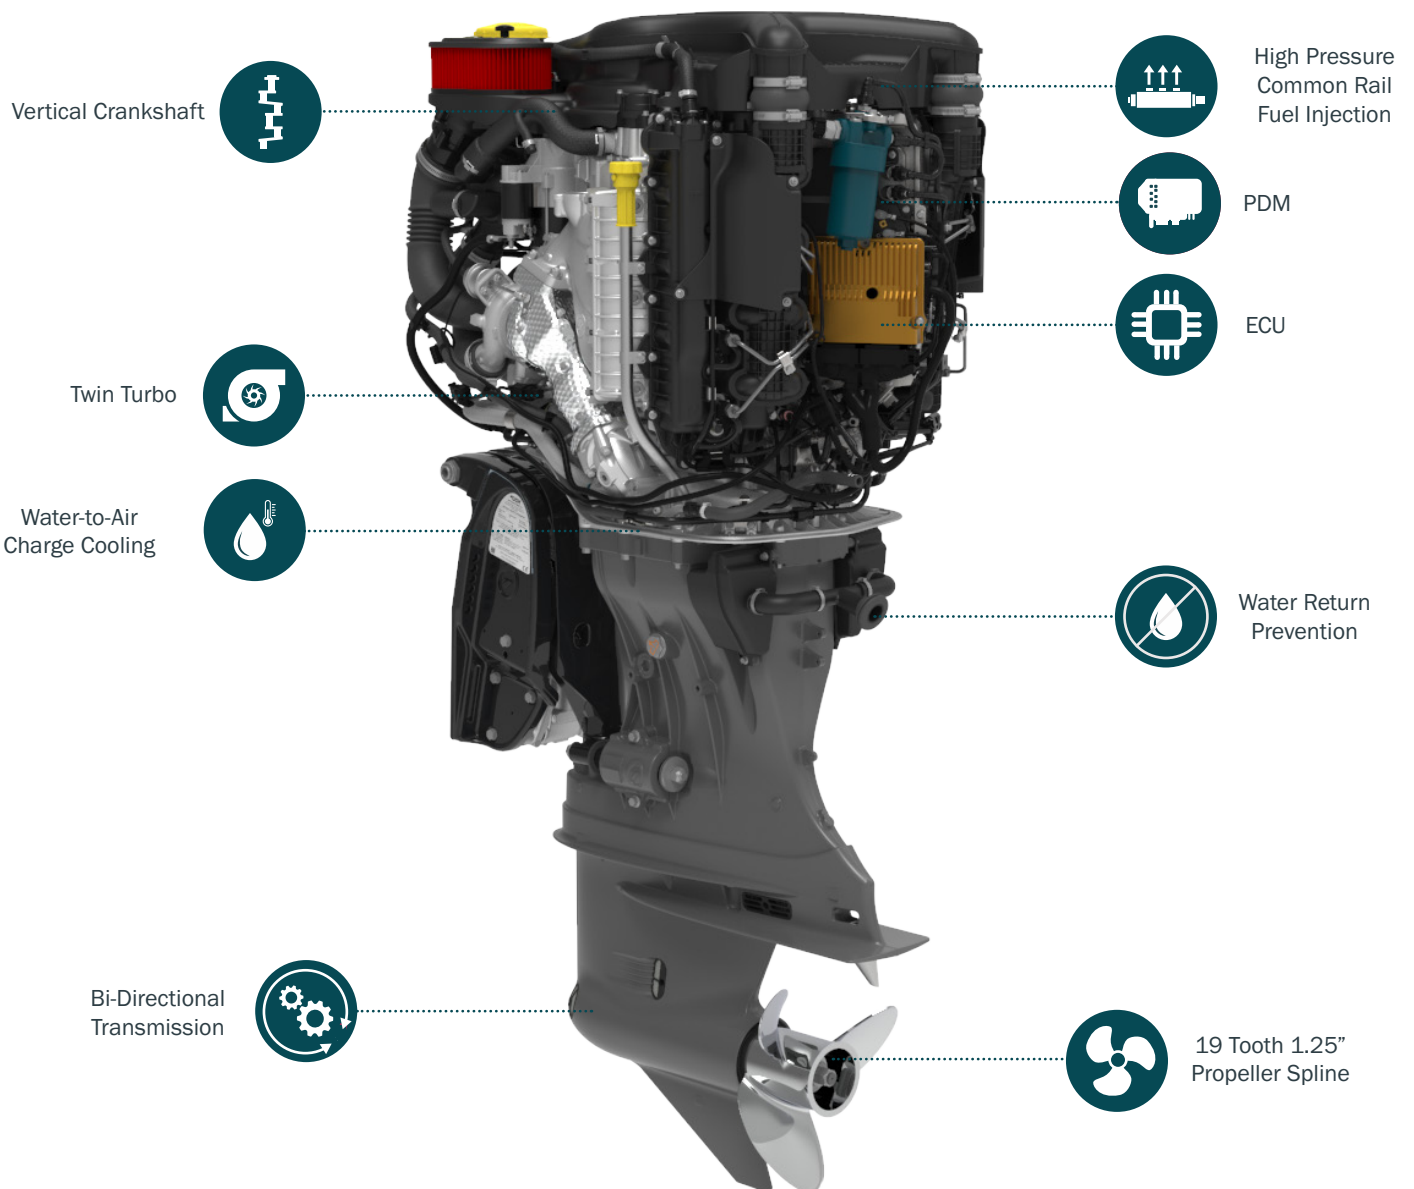

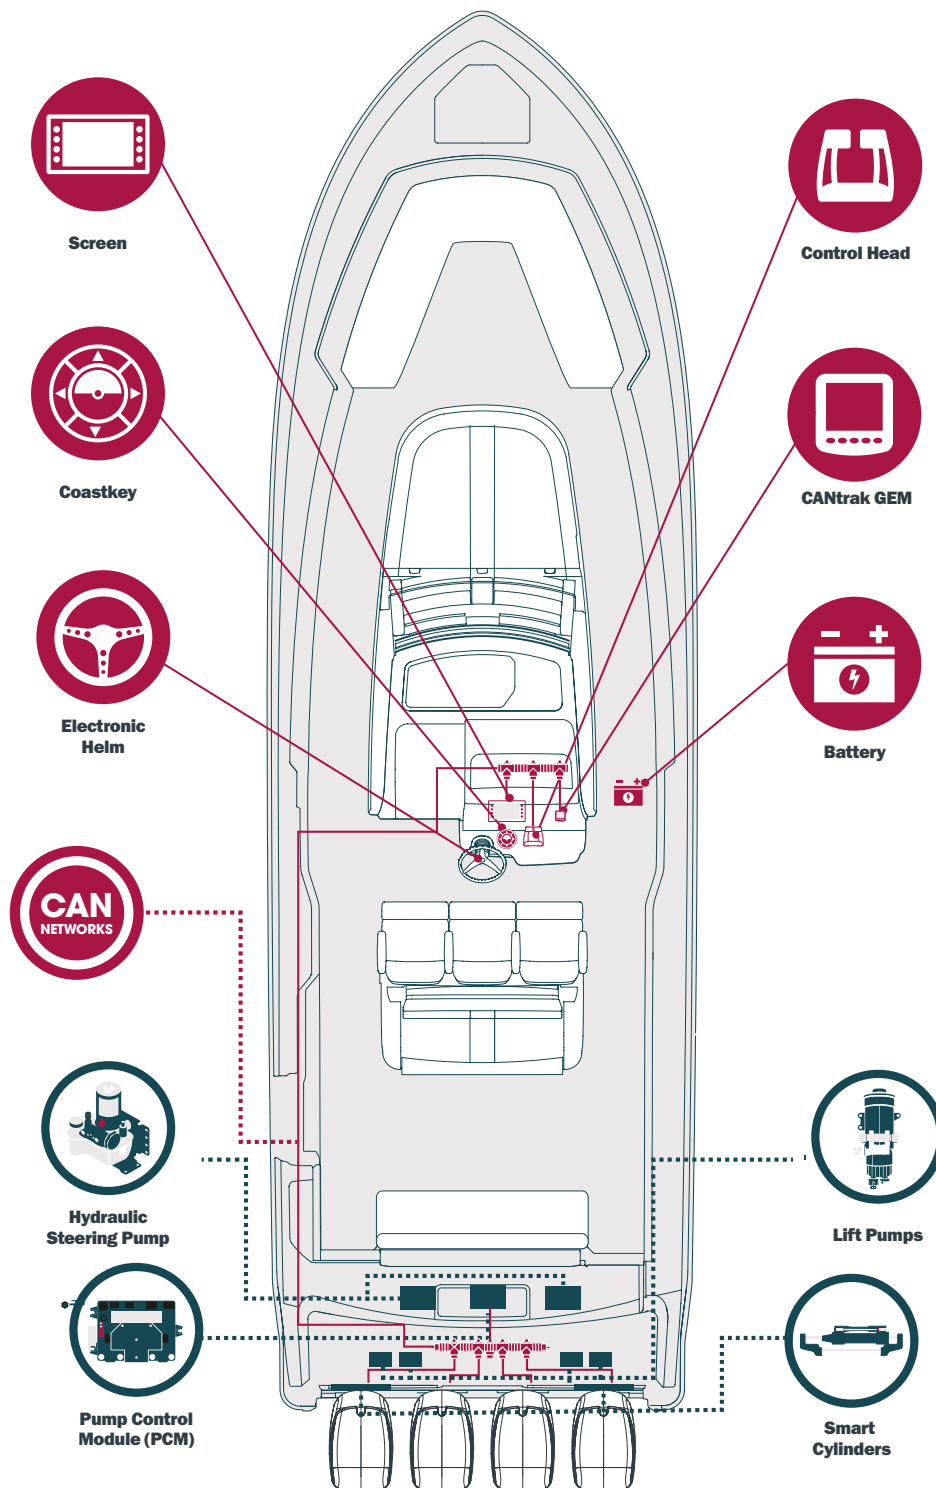

**More information**

To find out more about Cox diesel outboards, please contact your nearest distributor [www.coxmarine.com/distributors](http://www.coxmarine.com/distributors)

**Cox Powertrain Limited**

8 Cecil Pashley Way  
Brighton City Airport  
Shoreham by Sea  
BN43 5FF United Kingdom

**Contact Us**

+44 (0)1273 454 424  
[marketing@coxpowertrain.com](mailto:marketing@coxpowertrain.com)  
[www.coxmarine.com](http://www.coxmarine.com)  
f t i y  
@CoxPowertrain

